


Alchip®-MV Series

- From 5.2L height
- Suitable to fit for downsized equipment
- Solvent-proof type (see PRECAUTIONS AND GUIDELINES)
- Pb-free design

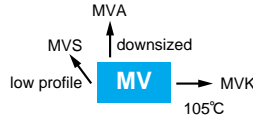


◆ SPECIFICATIONS

Items	Characteristics										
Category	Surface Mount Aluminum Electrolytic Capacitor										
Temperature Range	-40 to +85°C										
Rated Voltage Range	4 to 63V _{dc}										
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)										
Leakage Current	I=0.01CV or 3μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)										
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	4V	6.3V	10V	16V	25V	35V	50V	63V		
	tanδ (Max.)	B55	0.42	0.27	0.23	0.19	0.16	0.14	0.12	—	
		D55 to F60	0.42	0.24	0.20	0.16	0.14	0.12	0.10	0.12	
H63 to JA0	—	0.40	0.30	0.26	0.16	0.14	0.12	0.12			
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	4V	6.3V	10V	16V	25V	35V	50V	63V		
	Z(-25°C)/Z(+20°C)	7	4	3	2	2	2	2	2		
	Z(-40°C)/Z(+20°C)	B55	17	10	8	6	4	3	3	—	
		D55 to F60	15	10	8	6	4	3	3	3	
H63 to JA0	—	10	8	6	4	3	3	3			
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours (B55 size 1000 hours) at 85°C.										
	Capacitance change	≤±20% of the initial value									
	D.F. (tanδ)	≤200% of the initial specified value									
	Leakage current	≤The initial specified value									
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 85°C without voltage applied.										
	Case code	B55				D55 to JA0					
	Capacitance change	≤±20% of the initial value				≤±15% of the initial value					
	D.F. (tanδ)	≤200% of the initial specified value				≤150% of the initial specified value					
	Leakage current	≤The initial specified value				≤The initial specified value					

◆ DIMENSIONS [mm]

● Terminal Code : A

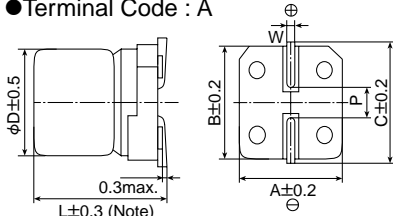


Note : L±0.5 for H63 to JA0


Size code	D	L	A	B	C	W	P
B55	3	5.2	3.3	3.3	3.7	0.45 to 0.75	0.8
D55 & D60	4	*5.2	4.3	4.3	5.1	0.5 to 0.8	1.0
E55 & E60	5	*5.2	5.3	5.3	5.9	0.5 to 0.8	1.4
F55 & F60	6.3	*5.2	6.6	6.6	7.2	0.5 to 0.8	1.9
H63	8	6.3	8.3	8.3	9.0	0.5 to 0.8	2.3
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

* : L=5.7 for D60, E60 and F60.

◆ MARKING

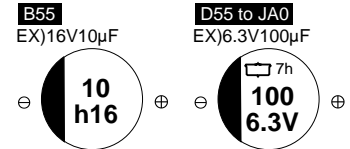

◆ PART NUMBERING SYSTEM

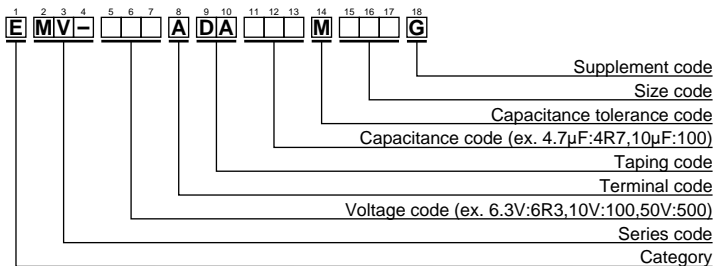

Please refer to "A guide to global code (surface mount type)"

◆ **STANDARD RATINGS**

VV (Vdc)	Cap (μF)	Size code	tanδ	Rated ripple current (mA _{rms} /85°C,120Hz)	Part No.	VV (Vdc)	Cap (μF)	Size code	tanδ	Rated ripple current (mA _{rms} /85°C,120Hz)	Part No.
4	22	B55	0.42	14	EMV-4R0ADA220MB55G	50	0.10	B55	0.12	1.0	EMV-500ADAR10MB55G
	33	D55	0.42	23	EMV-4R0ADA330MD55G		0.10	D55	0.10	1.3	EMV-500ADAR10MD55G
	47	D55	0.42	27	EMV-4R0ADA470MD55G		0.15	B55	0.12	2.0	EMV-500ADAR15MB55G
	68	E55	0.42	38	EMV-4R0ADA680ME55G		0.15	D55	0.10	2.0	EMV-500ADAR15MD55G
	100	E55	0.42	46	EMV-4R0ADA101ME55G		0.22	B55	0.12	2.0	EMV-500ADAR22MB55G
220	F55	0.42	74	EMV-4R0ADA221MF55G	0.22		D55	0.10	2.9	EMV-500ADAR22MD55G	
6.3	15	B55	0.27	14.5	EMV-6R3ADA150MB55G		0.33	B55	0.12	3.0	EMV-500ADAR33MB55G
	22	B55	0.27	17.5	EMV-6R3ADA220MB55G		0.33	D55	0.10	3.5	EMV-500ADAR33MD55G
	22	D55	0.24	23	EMV-6R3ADA220MD55G		0.47	B55	0.12	3.8	EMV-500ADAR47MB55G
	47	E55	0.24	38	EMV-6R3ADA470ME55G		0.47	D55	0.10	4.2	EMV-500ADAR47MD55G
	100	F55	0.24	60	EMV-6R3ADA101MF55G		0.68	B55	0.12	4.6	EMV-500ADAR68MB55G
	330	H63	0.40	190	EMV-6R3ADA331MH63G		0.68	D55	0.10	5.1	EMV-500ADAR68MD55G
10	470	HA0	0.40	265	EMV-6R3ADA471MHA0G		1.0	B55	0.12	5.6	EMV-500ADA1R0MB55G
	1000	JA0	0.40	400	EMV-6R3ADA102MJA0G		1.0	D55	0.10	6.2	EMV-500ADA1R0MD55G
	10	B55	0.23	12.8	EMV-100ADA100MB55G		1.5	B55	0.12	6.9	EMV-500ADA1R5MB55G
	15	D55	0.20	20	EMV-100ADA150MD55G		1.5	D55	0.10	7.5	EMV-500ADA1R5MD55G
	33	E55	0.20	35	EMV-100ADA330ME55G		2.2	B55	0.12	8.3	EMV-500ADA2R2MB55G
	68	F55	0.20	54	EMV-100ADA680MF55G		2.2	D55	0.10	10	EMV-500ADA2R2MD55G
16	100	F60	0.20	70	EMV-100ADA101MF60G		3.3	D55	0.10	14	EMV-500ADA3R3MD55G
	220	H63	0.30	175	EMV-100ADA221MH63G		4.7	E55	0.10	19	EMV-500ADA4R7ME55G
	6.8	B55	0.19	11.6	EMV-160ADA6R8MB55G		6.8	F55	0.10	24	EMV-500ADA6R8MF55G
	10	B55	0.19	14	EMV-160ADA100MB55G		10	F55	0.10	29	EMV-500ADA100MF55G
	10	D55	0.16	17	EMV-160ADA100MD55G		15	F60	0.10	32	EMV-500ADA150MF60G
	15	E55	0.16	26	EMV-160ADA150ME55G		22	F60	0.10	45	EMV-500ADA220MF60G
	22	E55	0.16	32	EMV-160ADA220ME55G		33	H63	0.12	95	EMV-500ADA330MH63G
	47	F55	0.16	50	EMV-160ADA470MF55G	47	HA0	0.12	140	EMV-500ADA470MHA0G	
	68	F60	0.16	78	EMV-160ADA680MF60G	68	JA0	0.12	170	EMV-500ADA680MJA0G	
	220	HA0	0.26	215	EMV-160ADA221MHA0G	100	JA0	0.12	195	EMV-500ADA101MJA0G	
	330	HA0	0.26	270	EMV-160ADA331MHA0G	63	0.10	D55	0.12	1.3	EMV-630ADAR10MD55G
470	JA0	0.26	330	EMV-160ADA471MJA0G	0.15		D55	0.12	2.0	EMV-630ADAR15MD55G	
4.7	B55	0.16	10.5	EMV-250ADA4R7MB55G	0.22		D55	0.12	2.9	EMV-630ADAR22MD55G	
6.8	D55	0.14	16	EMV-250ADA6R8MD55G	0.33		D55	0.12	3.5	EMV-630ADAR33MD55G	
33	F55	0.14	45	EMV-250ADA330MF55G	0.47		D55	0.12	4.2	EMV-630ADAR47MD55G	
47	F60	0.14	65	EMV-250ADA470MF60G	0.68		D55	0.12	5.1	EMV-630ADAR68MD55G	
68	H63	0.16	115	EMV-250ADA680MH63G	1.0		D60	0.12	7.0	EMV-630ADA1R0MD60G	
100	H63	0.16	145	EMV-250ADA101MH63G	1.5		D60	0.12	8.4	EMV-630ADA1R5MD60G	
330	JA0	0.16	305	EMV-250ADA331MJA0G	2.2		D60	0.12	10	EMV-630ADA2R2MD60G	
2.2	B55	0.14	7.7	EMV-350ADA2R2MB55G	3.3		D60	0.12	13	EMV-630ADA3R3MD60G	
3.3	B55	0.14	9.4	EMV-350ADA3R3MB55G	4.7		F60	0.12	18.5	EMV-630ADA4R7MF60G	
4.7	D55	0.12	15	EMV-350ADA4R7MD55G	6.8		F60	0.12	21	EMV-630ADA6R8MF60G	
6.8	E55	0.12	20	EMV-350ADA6R8ME55G	10		HA0	0.12	46	EMV-630ADA100MHA0G	
10	E55	0.12	25	EMV-350ADA100ME55G	15		HA0	0.12	52	EMV-630ADA150MHA0G	
15	F55	0.12	33	EMV-350ADA150MF55G	22		HA0	0.12	69	EMV-630ADA220MHA0G	
22	F55	0.12	40	EMV-350ADA220MF55G	33		HA0	0.12	85	EMV-630ADA330MHA0G	
33	F60	0.12	55	EMV-350ADA330MF60G	47		HA0	0.12	101	EMV-630ADA470MHA0G	
47	H63	0.14	105	EMV-350ADA470MH63G	68		JA0	0.12	125	EMV-630ADA680MJA0G	
68	HA0	0.14	157	EMV-350ADA680MHA0G							
100	HA0	0.14	175	EMV-350ADA101MHA0G							
220	JA0	0.14	265	EMV-350ADA221MJA0G							